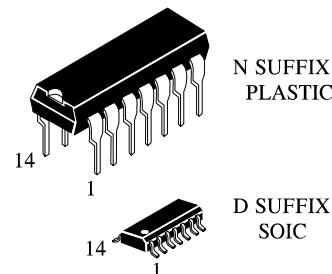


IN74LV14**Hex Schmitt-Trigger Inverter**

The 74LV14 is a low-voltage Si-gate CMOS device and is pin and function compatible with 74HC/HCT14.


The 74LV14 provides six inverting buffers with Schmitt-trigger action.

- Wide Operating Voltage: 1.0 to 5.5 V
- Optimized for Low Voltage applications: 1.0 to 3.6 V
- Accepts TTL input levels between $V_{CC} = 2.7$ V and $V_{CC} = 3.6$ V
- Low input current

**ORDERING INFORMATION**

| | |
|-----------|---------|
| IN74LV14N | Plastic |
| IN74LV14D | SOIC |
| IZ74LV14 | Chip |

$T_A = -40^\circ \text{ to } 125^\circ \text{ C}$ for all packages

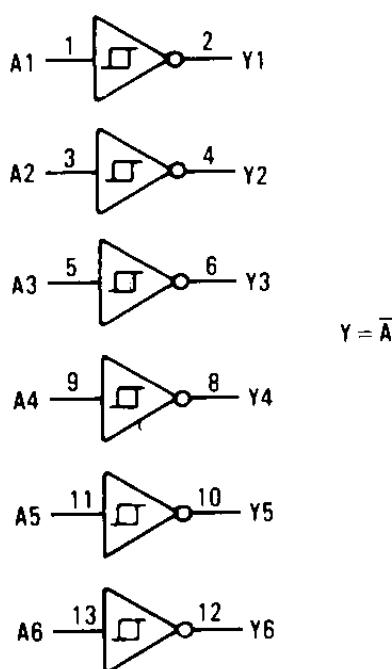LOGIC DIAGRAM

PIN 14 = V_{CC}
PIN 7 = GND

PIN ASSIGNMENT

| | | | |
|-----|-----|----|----------|
| A1 | 1 ● | 14 | V_{CC} |
| Y1 | 2 | 13 | A6 |
| A2 | 3 | 12 | Y6 |
| Y2 | 4 | 11 | A5 |
| A3 | 5 | 10 | Y5 |
| Y3 | 6 | 9 | A4 |
| GND | 7 | 8 | Y4 |

FUNCTION TABLE

| Input | Output |
|-------|---------------|
| A | $Y = \bar{A}$ |
| L | H |
| H | L |

MAXIMUM RATINGS*

| Symbol | Parameter | Value | Unit |
|--------------------------------|--|-------------|------|
| V _{CC} | DC supply voltage (Referenced to GND) | -0.5 ÷ +7.0 | V |
| I _{IK} * ¹ | DC input diode current | ±20 | mA |
| I _{OK} * ² | DC output diode current | ±50 | mA |
| I _O * ³ | DC output source or sink current -bus driver outputs | ±25 | mA |
| I _{GND} | DC GND current for types with - bus driver outputs | ±50 | mA |
| I _{CC} | DC V _{CC} current for types with - bus driver outputs | ±50 | mA |
| P _D | Power dissipation per paskade, plastic DIP+ SOIC package+ | 750 500 | mW |
| T _{tsg} | Storage temperature | -65 ÷ +150 | °C |
| T _L | Lead temperature, 1.5 mm from Case for 10 seconds (Plastic DIP), 0.3 mm (SOIC Package) | 260 | °C |

*Maximum Ratings are those values beyond which damage to the device may occur.

Functional operation should be restricted to the Recommended Operating Conditions.

+Derating - Plastic DIP: - 12 mW/°C from 70° to 125°C

SOIC Package: : - 8 mW/°C from 70° to 125°C

*¹: V_I < -0.5V or V_I > V_{CC}+0.5V

*²: V_O < -0.5V or V_O > V_{CC}+0.5V

*³: -0.5V < V_O < V_{CC}+0.5V

RECOMMENDED OPERATING CONDITIONS

| Symbol | Parameter | Min | Max | Unit | |
|------------------------------------|--|--|------------------|-------------------------|----|
| V _{CC} | DC Supply Voltage (Referenced to GND) | 1.0 | 5.5 | V | |
| V _{IN} , V _{OUT} | DC Input Voltage, Output Voltage (Referenced to GND) | 0 | V _{CC} | V | |
| T _A | Operating Temperature, All Package Types | -40 | +125 | °C | |
| t _r , t _f | Input Rise and Fall Time | 1.0 V≤V _{CC} <2.0 V 2.0 V≤V _{CC} <2.7 V 2.7 V≤V _{CC} <3.6 V 3.6 V≤V _{CC} ≤5.5 V | 0 0 0 0 | 500 200 100 50 | ns |

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation, V_{IN} and V_{OUT} should be constrained to the range GND≤(V_{IN} or V_{OUT})≤V_{CC}.

Unused inputs must always be tied to an appropriate logic voltage level (e.g., either GND or V_{CC}). Unused outputs must be left open.

DC ELECTRICAL CHARACTERISTICS (Voltages Referenced to GND)

| Symbol | Parameter | Test Conditions | V _{CC} V | Guaranteed Limit | | | | | | Unit | |
|------------------|--|--|---|------------------|------|--------------|------|---------------|------|------|--|
| | | | | 25°C | | -40°C ÷ 85°C | | -40°C ÷ 125°C | | | |
| | | | | min | max | min | max | min | max | | |
| V _{IT+} | Positive-Going Input Threshold Voltage | V _O ≥ V _{OH} | 1.2 | 0.45 | 0.95 | 0.4 | 1.0 | 0.4 | 1.0 | V | |
| | | | 2.0 | 0.85 | 1.35 | 0.8 | 1.4 | 0.8 | 1.4 | | |
| | | | 2.7 | 1.05 | 1.95 | 1.0 | 2.0 | 1.0 | 2.0 | | |
| | | | 3.0 | 1.25 | 2.15 | 1.2 | 2.2 | 1.2 | 2.2 | | |
| | | | 3.6 | 1.55 | 2.35 | 1.5 | 2.4 | 1.5 | 2.4 | | |
| | | | 4.5 | 1.75 | 3.10 | 1.7 | 3.15 | 1.7 | 3.15 | | |
| | | | 5.5 | 2.15 | 3.80 | 2.1 | 3.85 | 2.1 | 3.85 | | |
| V _{IT-} | Negative-Going Input Threshold Voltage | V _O ≤ V _{OL} | 1.2 | 0.2 | 0.65 | 0.15 | 0.7 | 0.15 | 0.7 | V | |
| | | | 2.0 | 0.35 | 0.85 | 0.3 | 0.9 | 0.3 | 0.9 | | |
| | | | 2.7 | 0.45 | 1.35 | 0.4 | 1.4 | 0.4 | 1.4 | | |
| | | | 3.0 | 0.65 | 1.45 | 0.6 | 1.5 | 0.6 | 1.5 | | |
| | | | 3.6 | 0.85 | 1.75 | 0.8 | 1.8 | 0.8 | 1.8 | | |
| | | | 4.5 | 0.95 | 1.95 | 0.9 | 2.0 | 0.9 | 2.0 | | |
| | | | 5.5 | 1.15 | 1.15 | 1.1 | 2.26 | 1.1 | 2.26 | | |
| V _H | Hysteresis Voltage | V _O ≥ V _{OH} V _O ≤ V _{OL} | 1.2 | 0.2 | 0.65 | 0.15 | 0.7 | 0.15 | 0.7 | V | |
| | | | 2.0 | 0.25 | 0.75 | 0.3 | 0.9 | 0.3 | 0.9 | | |
| | | | 2.7 | 0.35 | 1.05 | 0.4 | 1.4 | 0.4 | 1.4 | | |
| | | | 3.0 | 0.45 | 1.15 | 0.6 | 1.5 | 0.6 | 1.5 | | |
| | | | 3.6 | 0.45 | 1.15 | 0.8 | 1.8 | 0.8 | 1.8 | | |
| | | | 4.5 | 0.45 | 1.35 | 0.9 | 2.0 | 0.9 | 2.0 | | |
| | | | 5.5 | 0.65 | 1.45 | 1.1 | 2.6 | 1.1 | 2.6 | | |
| V _{OH} | High-Level Output Voltage | V _I =V _{IH} – or V _{IL} I _O = -100 μA | 1.2 | 1.05 | - | 1.0 | - | 1.0 | - | V | |
| | | | 2.0 | 1.85 | - | 1.8 | - | 1.8 | - | | |
| | | | 2.7 | 2.55 | - | 2.5 | - | 2.5 | - | | |
| | | | 3.0 | 2.85 | - | 2.8 | - | 2.8 | - | | |
| | | | 3.6 | 3.45 | - | 3.4 | - | 3.4 | - | | |
| | | | 4.5 | 4.35 | - | 4.3 | - | 4.3 | - | | |
| | | | 5.5 | 5.35 | - | 5.3 | - | 5.3 | - | | |
| V _{OH} | High-Level Output Voltage | V _I =V _{IH} – or V _{IL} I _O = -6.0 mA | 3.0 | 2.48 | - | 2.40 | - | 2.20 | - | V | |
| | | | 4.5 | 3.70 | - | 3.60 | - | 3.50 | - | | |
| | | | V _I =V _{IH} – or V _{IL} I _O = -12.0 mA | - | - | - | - | - | - | | |
| | | | V _I =V _{IH} – or V _{IL} I _O = 100 μA | 1.2 | - | 0.15 | - | 0.2 | - | | |
| | | | 2.0 | - | 0.15 | - | 0.2 | - | 0.2 | | |
| | | | 2.7 | - | 0.15 | - | 0.2 | - | 0.2 | | |
| | | | 3.0 | - | 0.15 | - | 0.2 | - | 0.2 | | |
| V _{OL} | Low-Level Output Voltage | V _I =V _{IH} – or V _{IL} I _O = 100 μA | 3.6 | - | 0.15 | - | 0.2 | - | 0.2 | V | |
| | | | 4.5 | - | 0.15 | - | 0.2 | - | 0.2 | | |
| | | | 5.5 | - | 0.15 | - | 0.2 | - | 0.2 | | |
| | | | V _I =V _{IH} – or V _{IL} I _O = -100 μA | 1.2 | - | 0.15 | - | 0.2 | - | | |
| | | | 2.0 | - | 0.15 | - | 0.2 | - | 0.2 | | |
| | | | 2.7 | - | 0.15 | - | 0.2 | - | 0.2 | | |
| | | | 3.0 | - | 0.15 | - | 0.2 | - | 0.2 | | |

DC ELECTRICAL CHARACTERISTICS (continuation)

| Symbol | Parameter | Test Conditions | V _{CC} V | Guaranteed Limit | | | | | | Unit | |
|------------------|--|--|----------------------|------------------|------|--------------|------|---------------|------|------|--|
| | | | | 25°C | | -40°C ÷ 85°C | | -40°C ÷ 125°C | | | |
| | | | | min | max | min | max | min | max | | |
| V _{OL} | Low-Level Output Voltage | V _I =V _{IH} – or I _O = 6.0 mA | 3.0 | - | 0.33 | - | 0.40 | - | 0.50 | V | |
| | | V _I =V _{IL} – or V _{IL} I _O = 12.0 mA | 4.5 | - | 0.40 | - | 0.55 | - | 0.65 | | |
| I _{IL} | Low-Level Input Leakage Current | V _I =0 V | 5.5 | - | -0.1 | - | -1.0 | - | -1.0 | µA | |
| I _{IH} | High-Level Input Leakage Current | V _I =V _{CC} | 5.5 | - | 0.1 | - | 1.0 | - | 1.0 | | |
| I _{CC} | Quiescent Supply Current (per Package) | V _I =0 V or V _{CC} I _O = 0 µA | 5.5 | - | 4.0 | - | 20 | - | 40 | µA | |
| I _{CC1} | Additional Quiescent Supply Current on input | V _I =V _{CC} - 0.6V I _O = 0 µA | 2.7 3.6 | - | 0.2 | - | 0.5 | - | 0.85 | mA | |

AC ELECTRICAL CHARACTERISTICS ($C_L=50 \text{ pF}$, $t_{LH}=t_{HL}=2.5 \text{ ns}$, $R_L=1 \text{ k}\Omega$)

| Symbol | Parameter | Test Conditions | V_{CC} V | Guaranteed Limit | | | | | | Unit | |
|--------------------|---|--|---------------------------------|-----------------------|-----------------------------|-----------------------|-----------------------------|-----------------------|-----------------------------|------|--|
| | | | | 25°C | | -40°C ÷ 85°C | | -40°C ÷ 125°C | | | |
| | | | | min | max | min | max | min | max | | |
| t_{PLH}, t_{PHL} | Propagation Delay, Input A to Output Y (Figure 1) | $V_I=0 \text{ V}$ or V_1 $t_{LH}=t_{HL}=2.5 \text{ ns}$ $C_L=50 \text{ pF}$ $R_L=1 \text{ k}\Omega$ | 1.2 2.0 2.7 3.0 4.5 | - - - - - | 150 28 22 17 14 | - - - - - | 170 37 28 22 18 | - - - - - | 200 48 35 28 23 | ns | |
| C_I | Input Capacitance | | 5.5 | - | 7.0 | - | 7.0 | - | 7.0 | pF | |
| C_{PD} | | $V_I=0 \text{ V}$ or V_{CC} | 5.5 | - | 30 | - | 30 | - | 30 | pF | |

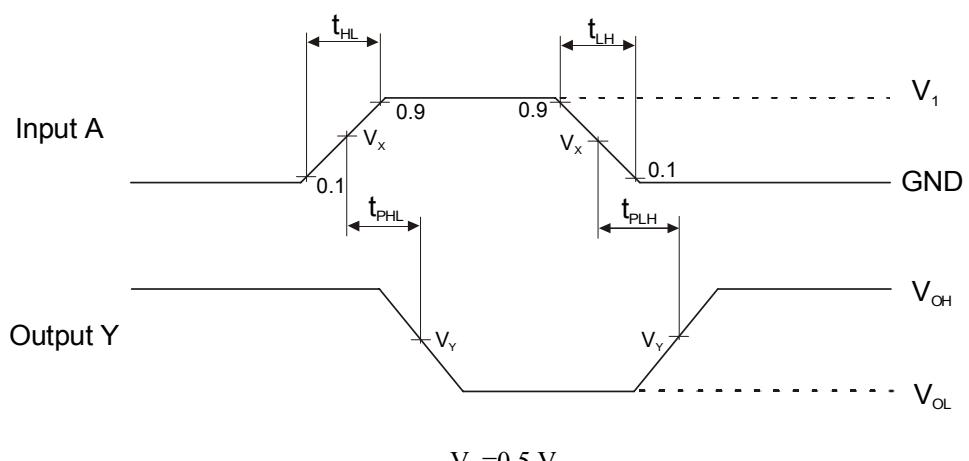


Figure 1. Switching Waveforms

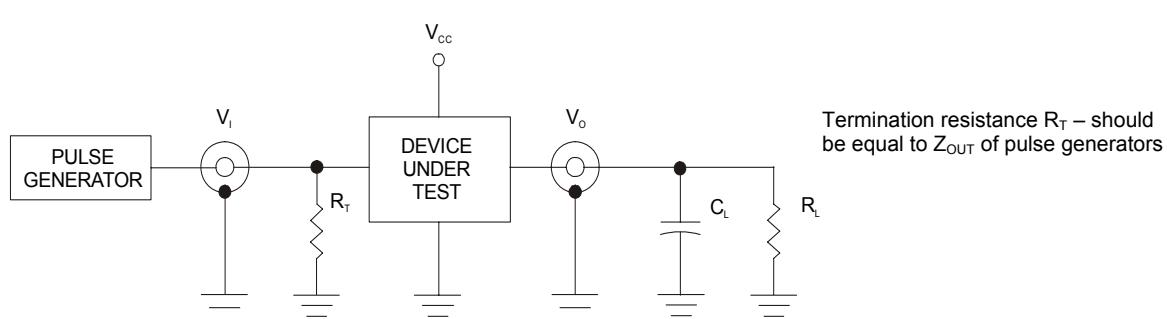
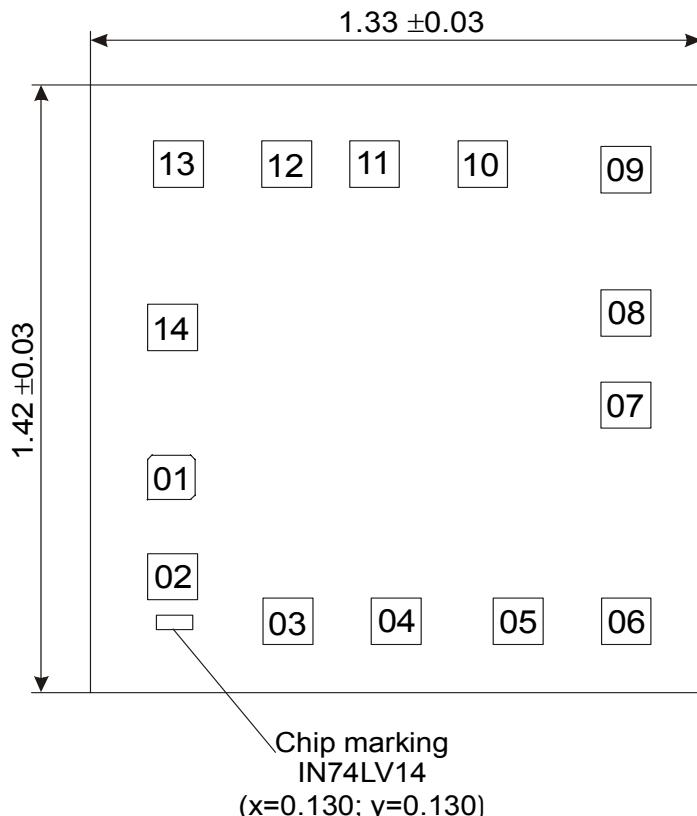


Figure 2. Test Circuit

CHIP PAD DIAGRAM IZ74LV14

Pad size 0.108 x 0.108 mm (Pad size is given as per metallization layer)
Thickness of chip 0.46 ± 0.02 mm

PAD LOCATION

| Pad No | Symbol | X | Y |
|--------|-----------------|-------|-------|
| 01 | A1 | 0.130 | 0.463 |
| 02 | Y1 | 0.130 | 0.230 |
| 03 | A2 | 0.381 | 0.126 |
| 04 | Y2 | 0.616 | 0.126 |
| 05 | A3 | 0.881 | 0.126 |
| 06 | Y3 | 1.116 | 0.126 |
| 07 | GND | 1.115 | 0.631 |
| 08 | Y4 | 1.115 | 0.846 |
| 09 | A4 | 1.115 | 1.181 |
| 10 | Y5 | 0.804 | 1.194 |
| 11 | A5 | 0.569 | 1.194 |
| 12 | Y6 | 0.378 | 1.194 |
| 13 | A6 | 0.143 | 1.194 |
| 14 | V _{CC} | 0.130 | 0.813 |

